



Apple Watch 38mm (1st generation)

Apple Watch 42mm (1st generation)

Apple Watch Series 1 38mm (2nd generation)

Apple Watch Series 1 42mm (2nd generation)

Apple Recycler Guide

April 2023

Contents

3	About This Guide
4	Identification
5	Directive 2012/19/EU Annex VII Components
6	Safety Considerations
9	Recommended Tools
10	Disassembly Instructions
20	Material Categorization of Output Fractions

About This Guide

Apple Recycler Guides provide guidance for electronics recyclers on how to disassemble products to maximize recovery of resources. The guides provide step-by-step disassembly instructions and information on the material composition to help recyclers direct fractions to the appropriate material recycler.

To conserve important resources, we work to reduce the materials we use and aim to one day source only recycled or renewable materials in our products. A key path to reaching that goal is resource recovery from end-of-life electronics.

Disassembly procedures are intended to be performed only by trained electronics recycling professionals. The recycler is responsible for independently evaluating and ensuring compliance with all applicable environmental, health, and safety laws related to the work. These include but are not limited to laws relating to the management, handling, shipping, and disposal of the outputs of this work as waste and laws in place to ensure the health and safety of all employees who support this work.

For questions or feedback about this guide, email contactesci@apple.com.


Note: The enclosures for Apple Watch (1st generation) and Apple Watch Series 1 may be aluminum, stainless steel, or 18-karat gold. This guide was created using Apple Watch Series 1 with an aluminum enclosure, but the procedures are the same for each model and enclosure material.

Identification

You can find the model number in the band slot of the Apple Watch.



If the band is attached, press and hold the band release button, then slide the band across to remove it.

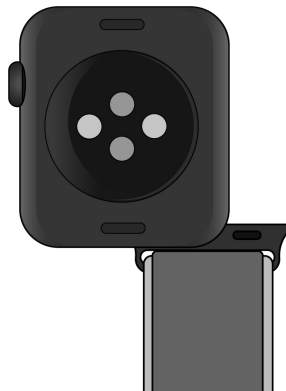

Model numbers:
A1553, A1554, A1802, A1803

Directive 2012/19/EU Annex VII Components

Directive 2012/19/EU Annex VII requirements apply to the following substances and components.

Substance/Component	Apple Part Name	Removal Instructions
Printed circuit board if the surface is greater than 10 square centimeters	Display logic board, main logic board	Follow steps 1–10
External electric cables	Power adapter, magnetic charging cable	Follow step 1
Battery	Lithium-ion polymer battery	Follow steps 1–4
Cover glass and organic light-emitting diode (OLED) display if the surface is greater than 100 square centimeters	OLED display	Follow steps 1–3
No further substances or components as listed in Annex VII		

Safety Considerations

The recycler is responsible for independently evaluating all activities undertaken by its employees to perform or support the work and ensuring compliance with all applicable health and safety laws related to the work. These include but are not limited to laws relating to the health and safety of all employees who perform or support this work. The recycler is also responsible for evaluating the workspace and ensuring that the area in which the work is to be undertaken is designed using ergonomic best practices and meets all ergonomic requirements to ensure the protection of its employees.

Personal Protective Equipment

Personal protective equipment should be worn during the entire recycling process.



Wear hand protection



Wear protective clothing



Wear eye protection



Wear foot protection



Wear a mask

Battery Safety

This product uses a lithium-ion polymer battery. Before beginning any disassembly work, ensure that a safe working procedure for handling lithium-ion batteries has been established, which could include discharging the batteries so that they can be more safely managed. The following considerations may also be included:

- Remove anything from your person that could conduct energy, such as jewelry and watches, to avoid electric shock to yourself or the logic board.
- To avoid the potential for thermal runaway and the release of potentially noxious fumes, don't puncture, strike, or crush lithium-ion polymer batteries or devices powered by them.
- Don't throw, drop, or bend the battery.
- Don't expose the battery to excessive heat or sunlight.
- Don't use tools that are sharp or conduct electricity.
- Keep your workspace clear of foreign objects and sharp materials.
- Dispose of batteries according to local environmental laws and guidelines.

Workspace safety guidelines

- Use heat-resistant gloves and safety glasses.
- Keep a sand dispenser within arm's reach (2 feet or 0.6 m) on one side of the workstation, not above the workstation. The dispenser should be a wide-mouthed, quick-pour metal container with a flip-top lid or tray that contains 8–10 cups (1.9–2.4 L) of clean, dry, untreated sand.
- Keep the battery at least 2 feet (0.6 m) from paper and other combustible materials.
- Work in an area with adequate ventilation.

Handling a thermal runaway

If you notice any of the following signs, a thermal runaway is likely underway, and you should act immediately:

- The lithium-ion polymer battery or a device containing one begins to smoke or emit sparks or soot.
- The battery pouch suddenly and quickly puffs out.
- You hear hissing or popping sounds.

Don't use water or an ABC/CO₂ fire extinguisher on a thermal runaway battery or a device containing one. Water and ABC/CO₂ fire extinguishers will not stop the reaction.

Do smother the battery or device immediately with plenty of clean, dry sand, dumped all at once. Timing is critical; the faster you pour all the sand, the faster the thermal runaway will stop.

Do leave the room for 30 minutes if the thermal runaway causes any irritation.

Do wait 30 minutes before touching the battery. Wear heat-resistant gloves and safety glasses to remove the battery from the sand, or use a touchless thermometer to measure the battery temperature. Only touch the battery when the event has finished.

Do dispose of the damaged battery or device (including any debris removed from the sand) according to local environmental laws and guidelines.

OLED Safety

Broken organic light-emitting diodes (OLEDs) must be handled properly to ensure the safety of your employees and mitigate any hazards. Package broken OLEDs in an appropriate container to properly manage the hazards associated with the materials and store only with compatible materials. All waste must be properly classified, packaged, and labeled in accordance with all relevant laws and regulations.

Hazard Warnings



Broken glass hazard




Rechargeable battery hazard




Chemical inhalation hazard

Recommended Tools


Miniature plastic pry bar




Miniature pry bar



Precision pick





Precision slotted screwdriver



Disassembly Instructions

1. Remove the power adapter and the magnetic charging cable.

- » *Ensure that the Apple Watch is turned off.*
- » *Unplug the power adapter. Disconnect both ends of the magnetic charging cable.*

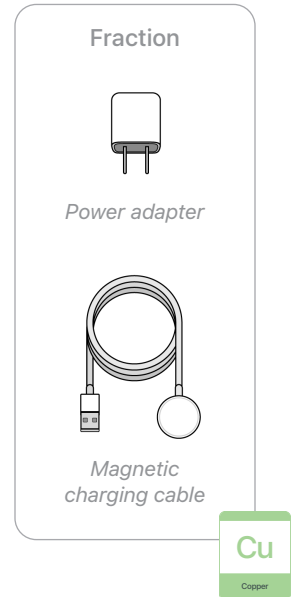

2. Remove the OLED display.





Broken glass hazard



Chemical inhalation hazard

- » *Hold the Apple Watch at the edge of a counter with the display facing up.*
- » *Insert the tool tip between the display and the enclosure. Push the handle down to pry the display from the enclosure.*


Tools Used

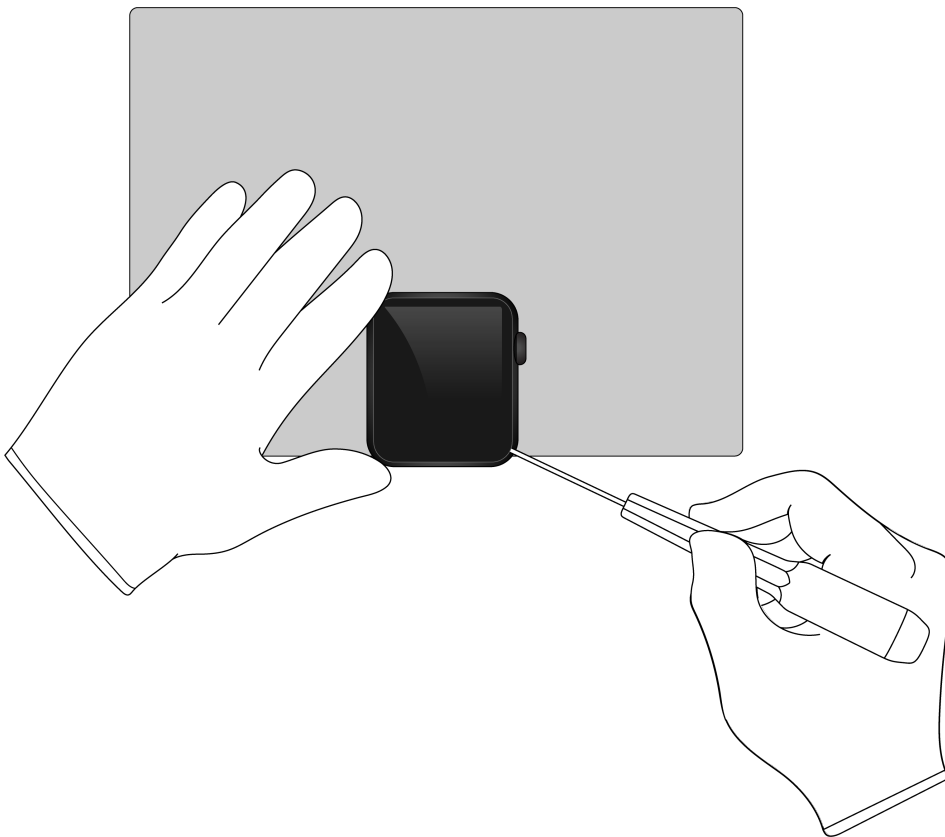

- » *Remove the display by hand. Set the enclosure aside.*

3. Remove the display logic board.


- » *Lay the display facedown.*
- » *Pry off the display logic board.*

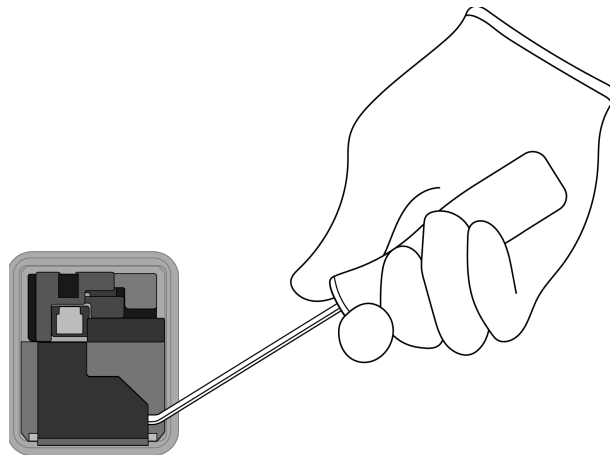

Tools Used



Fraction



Display logic board

PMs
Precious
Metals


Fraction




OLED display

GL
Glass

4. From the enclosure, carefully remove the lithium-ion polymer battery.


 Rechargeable battery hazard

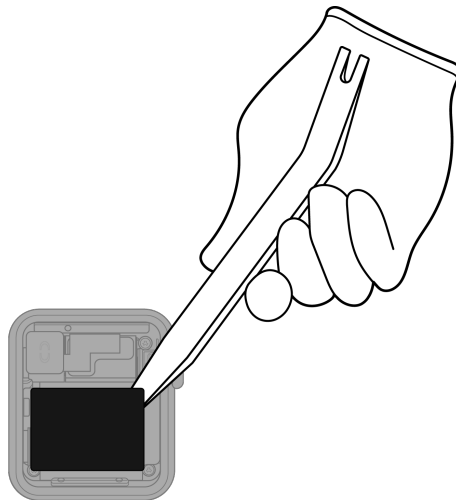

Tools Used




Fraction



Lithium-ion polymer battery

BT
Battery

5. Pry off the ribbon cable.

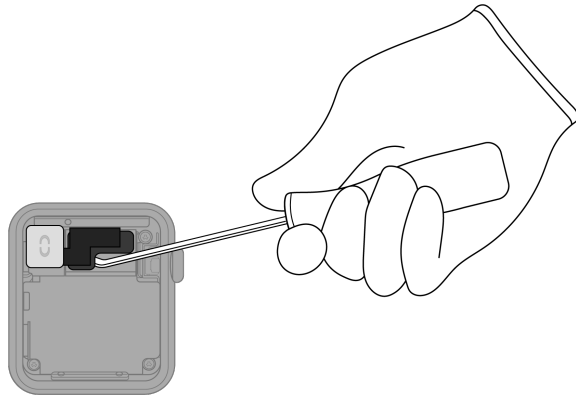

Tools Used




Fraction



Ribbon cable

Cu
Copper

6. Pry off the Taptic Engine.

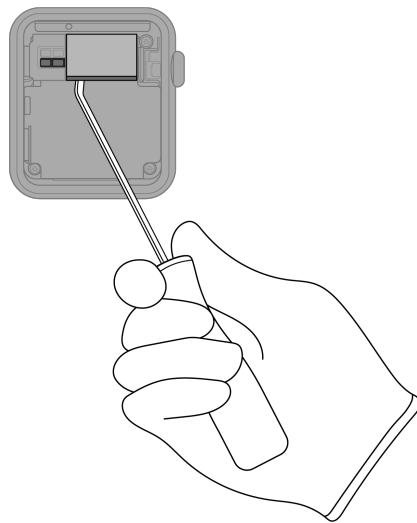

Tools Used




Fraction



Taptic Engine

REE
Rare Earth
Elements


7. Pry off the speaker.

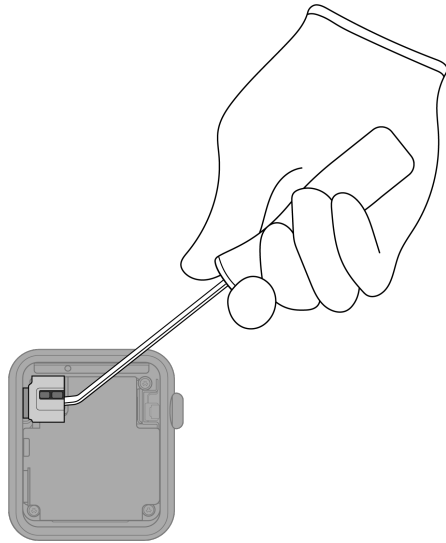

Tools Used




Fraction



Speaker



8. Pry off the antenna.

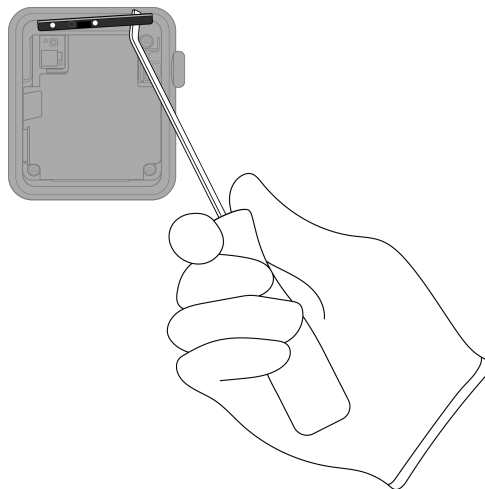

Tools Used




Fraction



Antenna



9. Pry off the microphone cover.

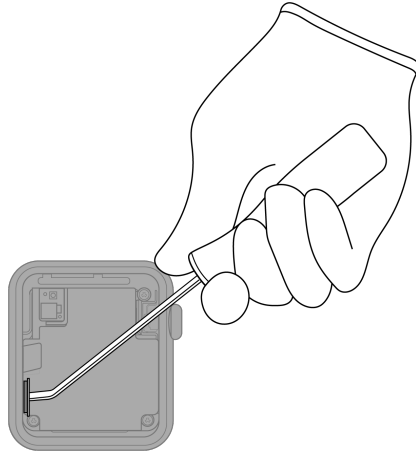

Tools Used




Fraction




Microphone cover

Cu
Copper


10. Pry off the main logic board.

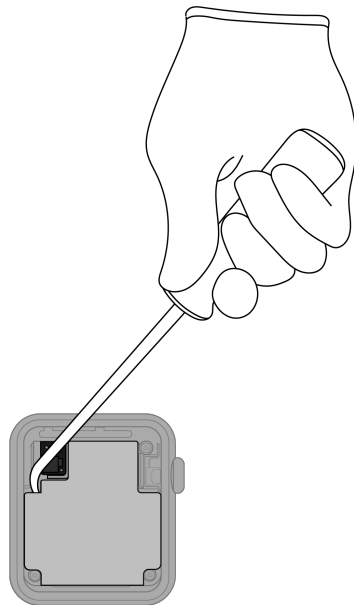

Tools Used




Fraction



Main logic board

PMs
Precious Metals


11. Pry off the microphone.

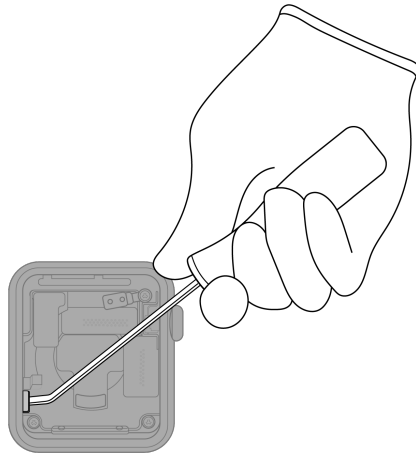

Tools Used



Fraction




Microphone

Cu

Copper

12. Pry off the ribbon cable assembly.

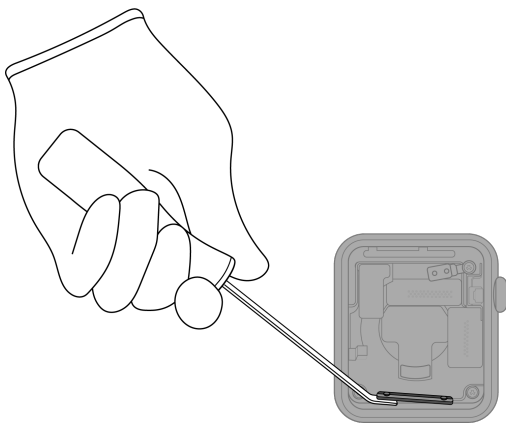

Tools Used



Fraction




Ribbon cable

Cu

Copper


13. Pry off the Force Touch gasket.

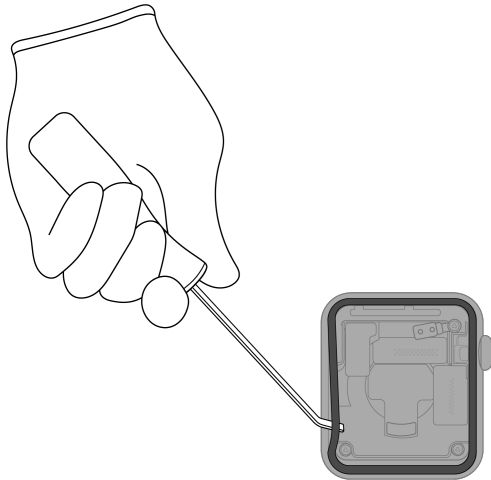

Tools Used



Fraction




Force Touch gasket

Cu

Copper

14. Pry off the remaining ribbon cables.

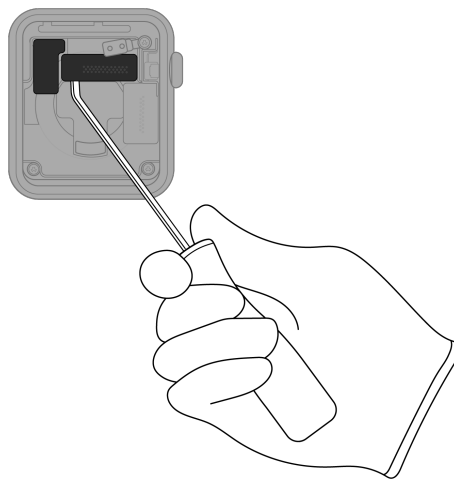

Tools Used



Fraction





Ribbon cables

Cu




Copper

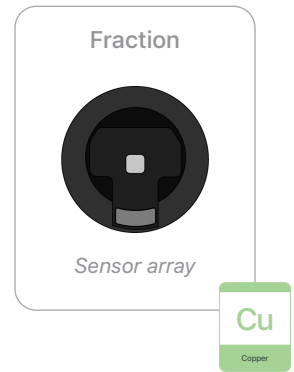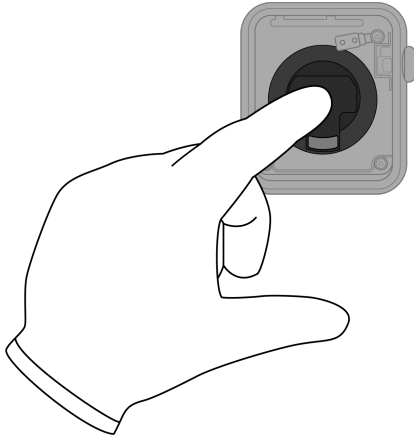

15. Push out the sensor array by hand.



Material Categorization of Output Fractions

All outputs from this process must be managed, handled, and disposed of in accordance with applicable waste laws and regulations, including but not limited to the Waste Framework Directive and its national enactments in Europe.

Fraction	Downstream Processing
<p data-bbox="435 554 570 579">Aluminum</p>  <p data-bbox="451 802 553 827"><i>Enclosure</i></p> <p data-bbox="215 869 786 991">Note: Depending on the material, the enclosures for Apple Watch (1st generation) and Apple Watch Series 1 may be processed as aluminum, ferrous (stainless steel enclosures), or gold.</p>	<p data-bbox="964 554 1276 579">Primary Target Material</p>  <p data-bbox="925 781 1313 806">Potential Additional Materials</p> 

<p data-bbox="440 1089 565 1115">Batteries</p>  <p data-bbox="367 1283 634 1308"><i>Lithium-ion polymer battery</i></p>	<p data-bbox="964 1089 1276 1115">Primary Target Material</p> 
---	--

Fraction

Downstream Processing

Glass



OLED display


Primary Target Material




Potential Additional Materials



Logic Boards



Display logic board



Main logic board

Primary Target Material



Potential Additional Materials




Fraction

Downstream Processing

Mixed Electronics



Power adapter



Magnetic charging cable



Ribbon cables



Antenna



Microphone cover

Primary Target Material




Potential Additional Materials




Fraction

Downstream Processing

Mixed Electronics (cont.)



Microphone




Force Touch gasket




Sensor array

Rare Earth Magnets



Taptic Engine



Speaker

Primary Target Material



Potential Additional Materials

