



**iPhone 3G**

**iPhone 3GS**

# Apple Recycler Guide

April 2023

# Contents

- 3 [About This Guide](#)
- 4 [Identification](#)
- 5 [Directive 2012/19/EU Annex VII Components](#)
- 6 [Safety Considerations](#)
- 8 [Recommended Tools](#)
- 9 [Disassembly Instructions](#)
- 30 [Material Categorization of Output Fractions](#)

# About This Guide

Apple Recycler Guides provide guidance for electronics recyclers on how to disassemble products to maximize recovery of resources. The guides provide step-by-step disassembly instructions and information on the material composition to help recyclers direct fractions to the appropriate material recycler.

To conserve important resources, we work to reduce the materials we use and aim to one day source only recycled or renewable materials in our products. A key path to reaching that goal is resource recovery from end-of-life electronics.


Disassembly procedures are intended to be performed only by trained electronics recycling professionals. The recycler is responsible for independently evaluating and ensuring compliance with all applicable environmental, health, and safety laws related to the work. These include but are not limited to laws relating to the management, handling, shipping, and disposal of the outputs of this work as waste and laws in place to ensure the health and safety of all employees who support this work.

For questions or feedback about this guide, email [contactesci@apple.com](mailto:contactesci@apple.com).

**Note:** This guide may show images from other similar models, but the procedures are the same.

# Identification

You can find the model number on the back of the iPhone.

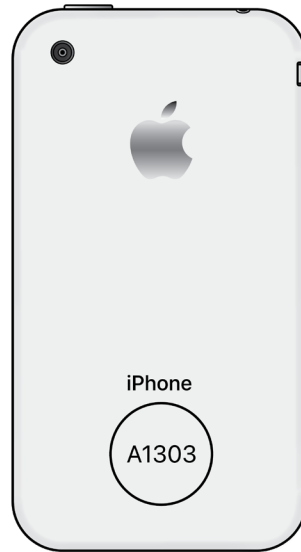

*Model numbers:*

*A1241, A1303, A1324, A1325*

# Directive 2012/19/EU Annex VII Components

Directive 2012/19/EU Annex VII requirements apply to the following substances and components.

Substance/Component	Apple Part Name	Removal Instructions
Printed circuit board if the surface is greater than 10 square centimeters	Main logic board	Follow steps 1–14
External electric cables	Power adapter, charge cable	Follow step 1
Battery	Lithium-ion polymer battery	Follow steps 1–15
Cover glass and liquid crystal display (LCD) cell if the surface is greater than 100 square centimeters	LCD cell	Follow steps 1–5
No further substances or components as listed in Annex VII		

# Safety Considerations

The recycler is responsible for independently evaluating all activities undertaken by its employees to perform or support the work and ensuring compliance with all applicable health and safety laws related to the work. These include but are not limited to laws relating to the health and safety of all employees who perform or support this work. The recycler is also responsible for evaluating the workspace and ensuring that the area in which the work is to be undertaken is designed using ergonomic best practices and meets all ergonomic requirements to ensure the protection of its employees.

## Personal Protective Equipment

Personal protective equipment should be worn during the entire recycling process.



Wear hand protection



Wear protective clothing



Wear eye protection



Wear foot protection

## Battery Safety

This product uses a lithium-ion polymer battery. Before beginning any disassembly work, ensure a safe working procedure for handling lithium-ion batteries has been established, which could include discharging the batteries so that they can be more safely managed. The following considerations may also be included:

- Remove anything from your person that could conduct energy, such as jewelry and watches, to avoid electric shock to yourself or the logic board.
- To avoid the potential for thermal runaway and the release of potentially noxious fumes, don't puncture, strike, or crush lithium-ion polymer batteries or devices powered by them.
- Don't throw, drop, or bend the battery.
- Don't expose the battery to excessive heat or sunlight.
- Don't use tools that are sharp or conduct electricity.
- Keep your workspace clear of foreign objects and sharp materials.
- Dispose of batteries according to local environmental laws and guidelines.

## Workspace safety guidelines

- Use heat-resistant gloves and safety glasses.
- Keep a sand dispenser within arm's reach (2 feet or 0.6 m) on one side of the workstation, not above the workstation. The dispenser should be a wide-mouthed, quick-pour metal container with a flip-top lid or tray that contains 8–10 cups (1.9–2.4 L) of clean, dry, untreated sand.
- Keep the battery at least 2 feet (0.6 m) from paper and other combustible materials.
- Work in an area with adequate ventilation.

## Handling a thermal runaway

If you notice any of the following signs, a thermal runaway is likely underway, and you should act immediately:

- The lithium-ion polymer battery or a device containing one begins to smoke or emit sparks or soot.
- The battery pouch suddenly and quickly puffs out.
- You hear hissing or popping sounds.

**Don't** use water or an ABC/CO<sub>2</sub> fire extinguisher on a thermal runaway battery or a device containing one. Water and ABC/CO<sub>2</sub> fire extinguishers will not stop the reaction.

**Do** smother the battery or device immediately with plenty of clean, dry sand, dumped all at once. Timing is critical; the faster you pour all the sand, the faster the thermal runaway will stop.

**Do** leave the room for 30 minutes if the thermal runaway causes any irritation.

**Do** wait 30 minutes before touching the battery. Wear heat-resistant gloves and safety glasses to remove the battery from the sand, or use a touchless thermometer to measure the battery temperature. Only touch the battery when the event has finished.

**Do** dispose of the damaged battery or device (including any debris removed from the sand) according to local environmental laws and guidelines.

## Hazard Warnings



Broken glass hazard




Rechargeable battery hazard




Chemical exposure hazard

# Recommended Tools


Flat-blade screwdriver

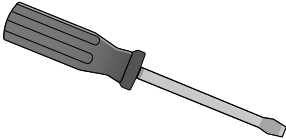


Miniature plastic pry bar

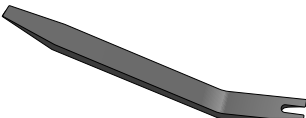

Miniature pry bar

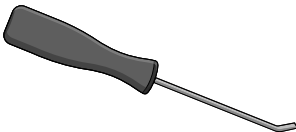

Precision slotted screwdriver



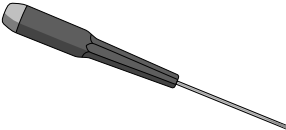




# Disassembly Instructions

## 1. Remove the power adapter and the charge cable.

- » *Ensure that the iPhone is turned off.*
- » *Unplug the power adapter. Disconnect both ends of the charge cable.*

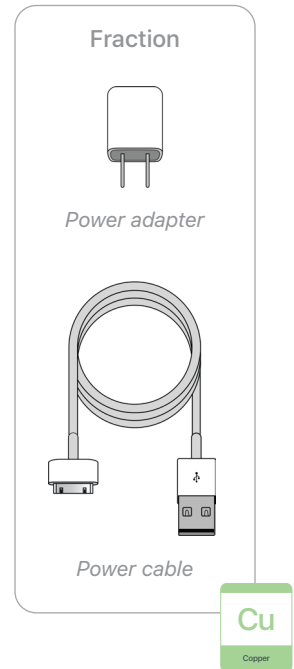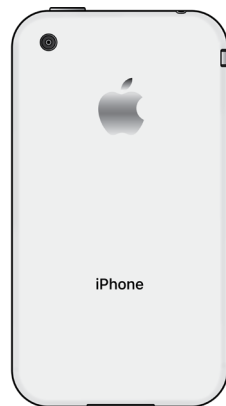

## 2. Remove the display.




Broken glass hazard




Chemical exposure hazard

### Tools Used




» Lay the iPhone with the display face up.


» Insert the tool tip between the display and the enclosure. Push the handle down to pry off the display. Set the enclosure aside.

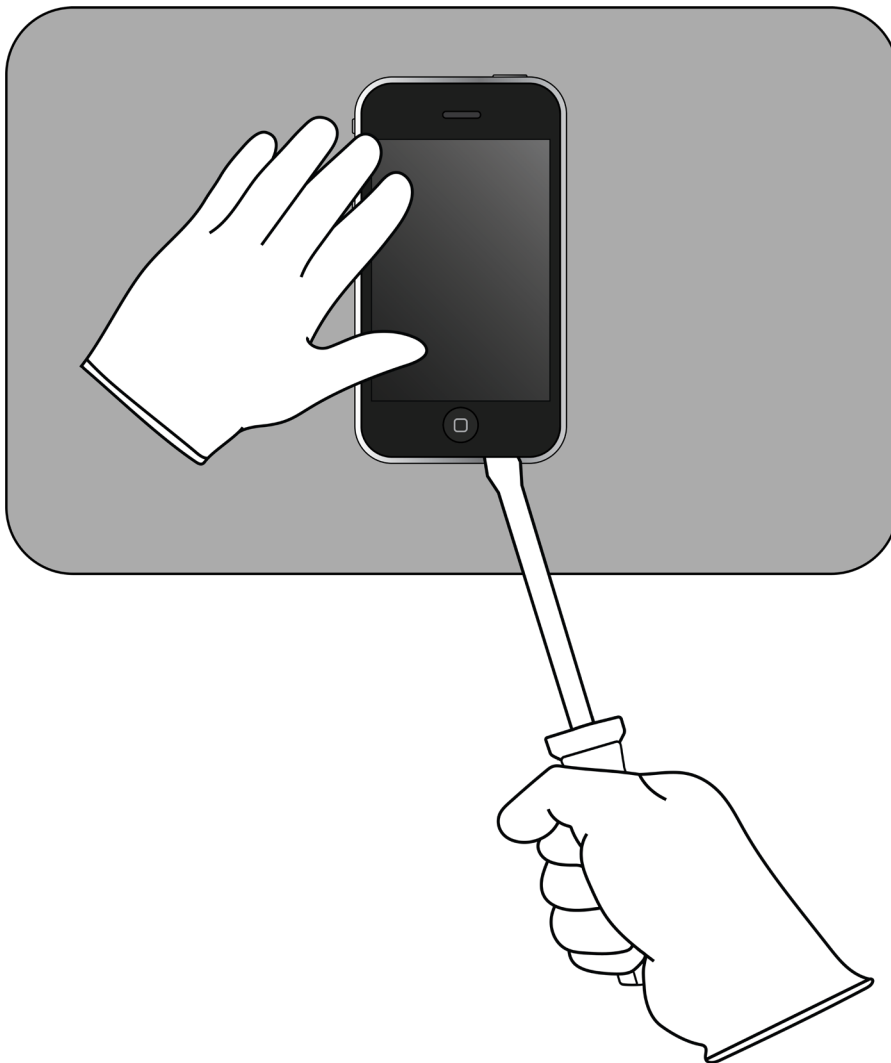


### 3. Pry off the display cover.

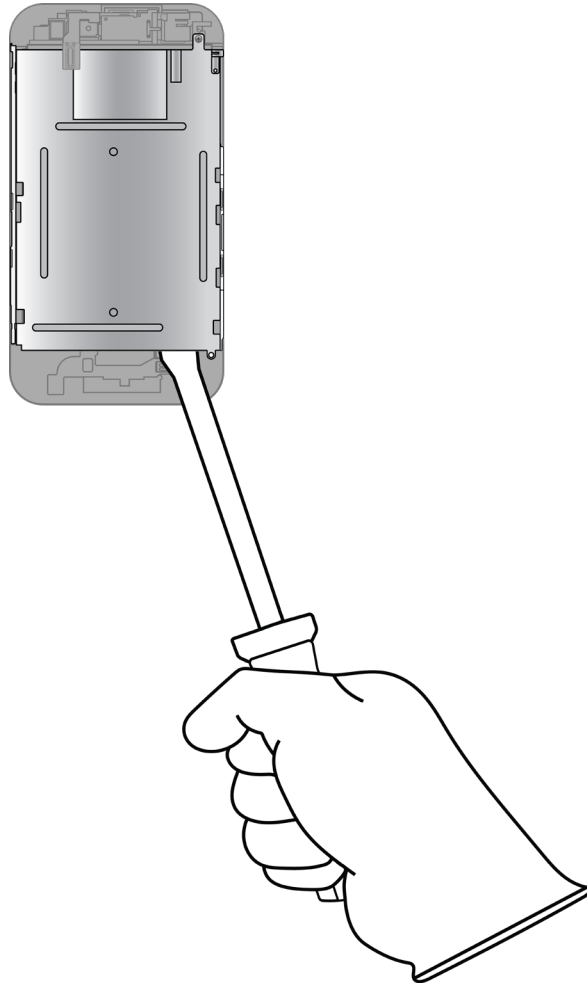

#### Tools Used



#### Fraction




Display cover


Fe

Ferrous


4. Pry off the LCD cell. Set the front panel aside.

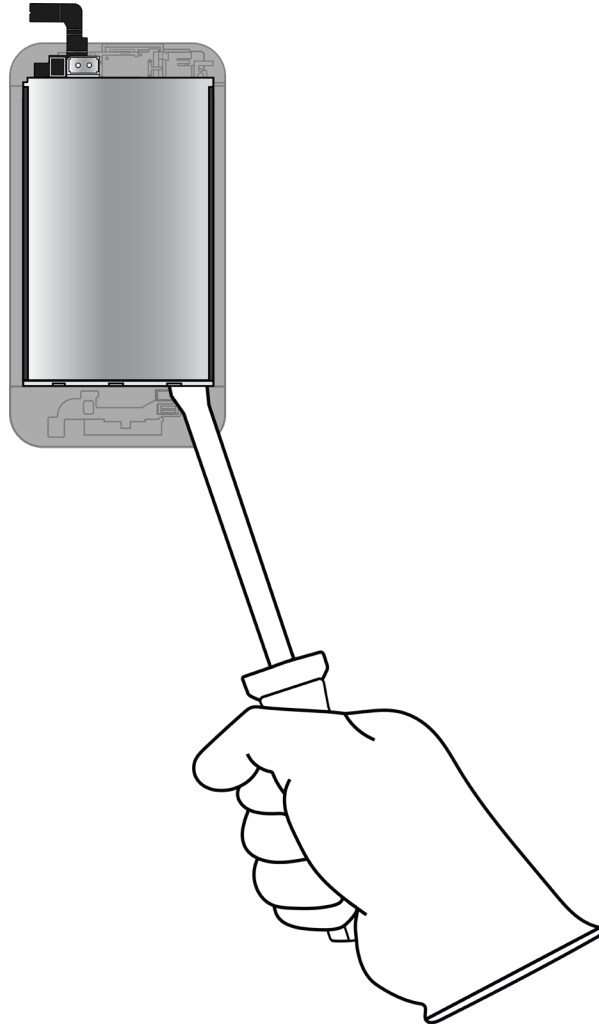


Tools Used




**5.** Pry the ribbon cable off the LCD cell.

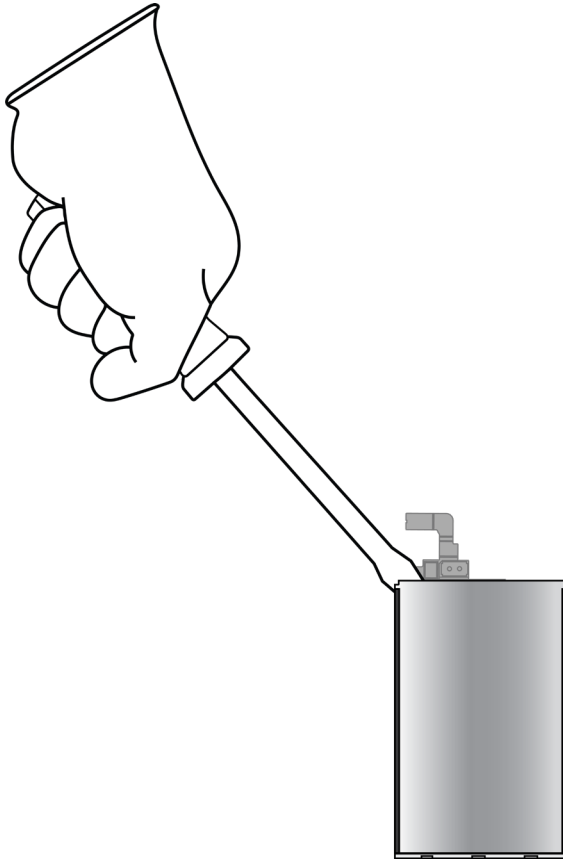

Tools Used



Fraction




*Ribbon cable*

**Cu**

Copper

Fraction




*LCD cell*


**GL**

Glass


6. On the front panel, pry off the receiver cover.

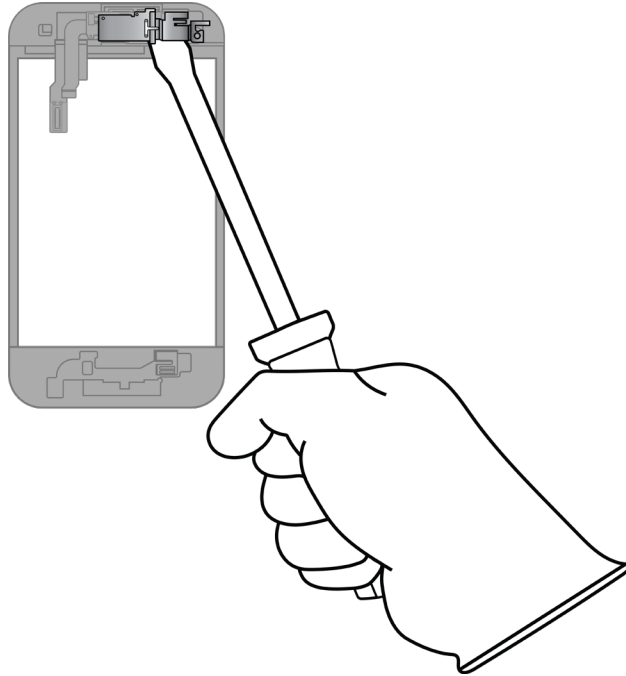

Tools Used



Fraction




Receiver cover


Fe

Ferrous


7. Pry the ribbon cable off the receiver.

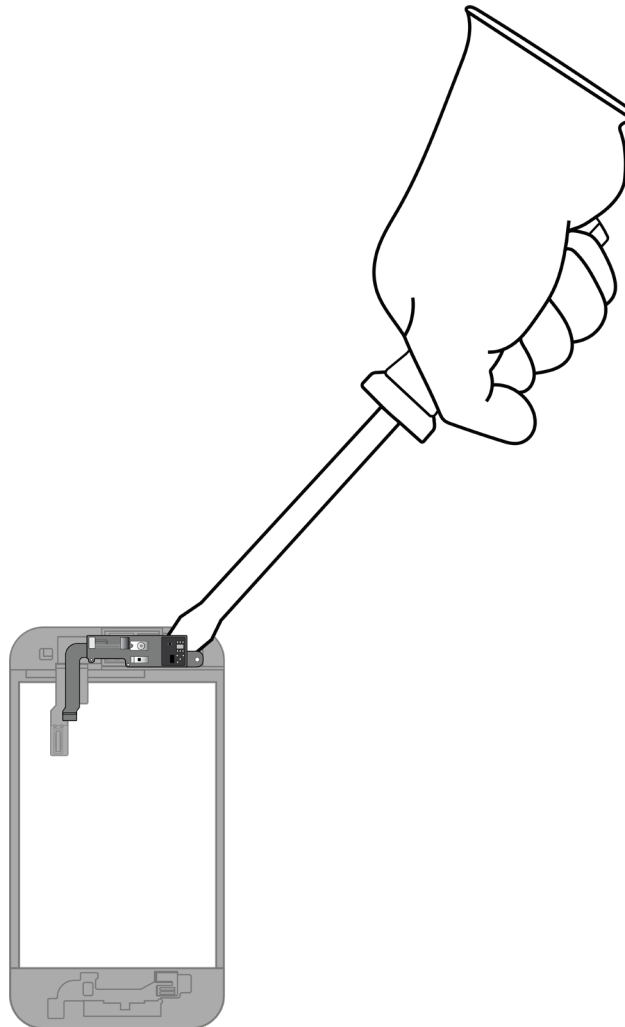

Tools Used



Fraction




Ribbon cable


Cu

Copper

8. Pry off the receiver.

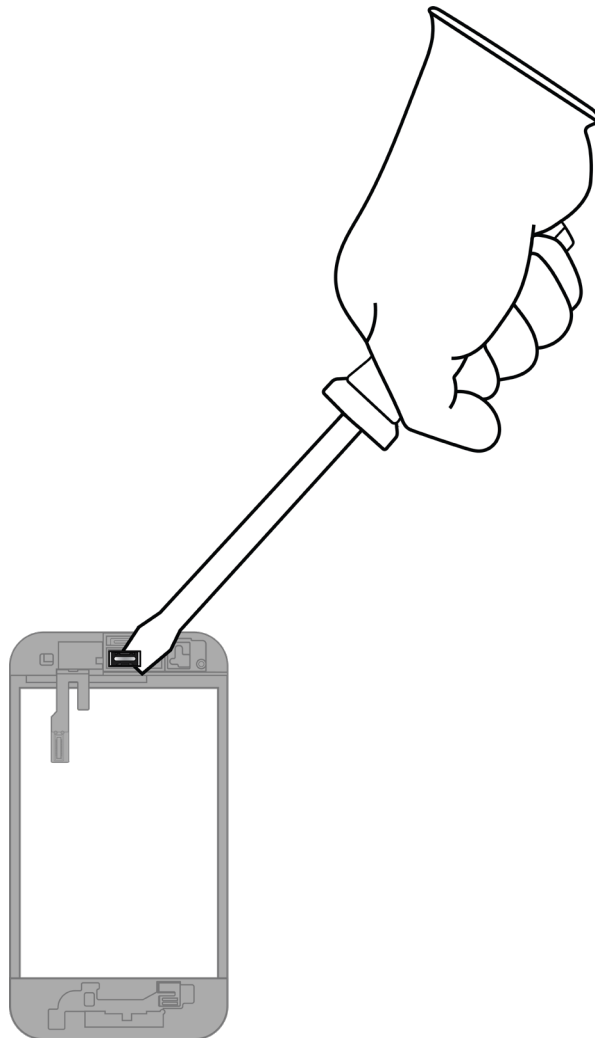

Tools Used



Fraction




Receiver






9. Pull the remaining ribbon cable off the front panel.

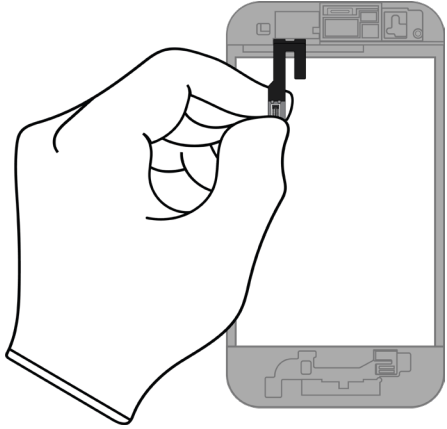

Fraction




Ribbon cable

Cu  
Copper

A diagram showing a black ribbon cable component. The cable has a flat, wide end with a notch and a narrower end with a connector. Below the component is a green box with the chemical symbol 'Cu' and the word 'Copper' underneath.

10. Pry the Home button assembly off the bottom of the front panel.

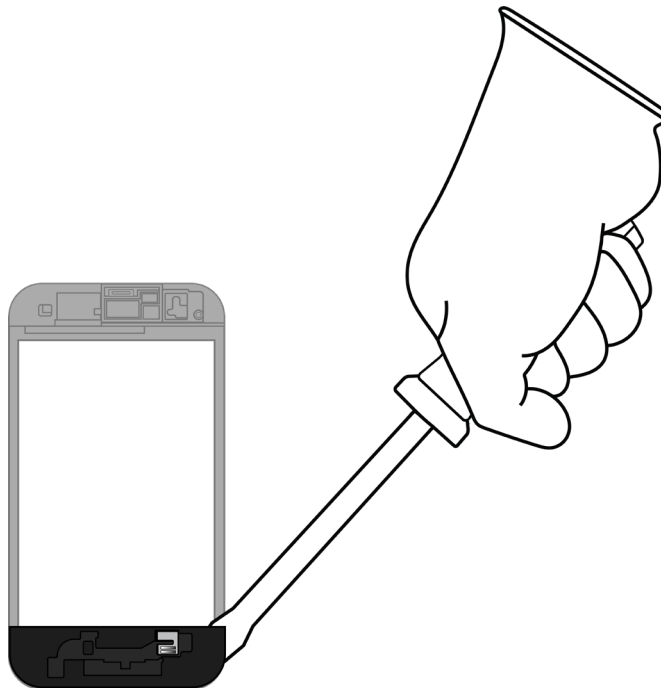

Tools Used

A diagram of a screwdriver with a black handle and a silver shaft.

Fraction




Front panel


GL  
Glass

A diagram showing a black iPhone front panel with a white screen and a white Home button. Below the component is a green box with the chemical symbol 'GL' and the word 'Glass' underneath.


**11.** Pry the Home button off its cover.

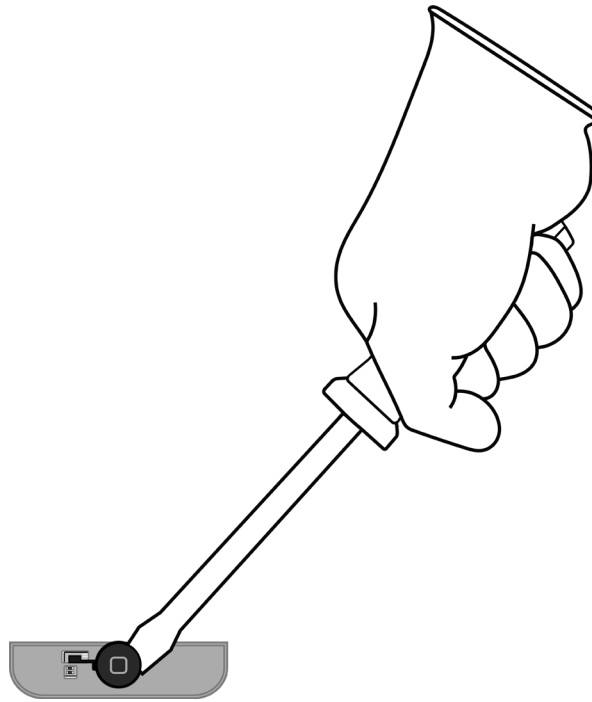

Tools Used



Fraction



*Home button*

**Cu**

Copper

Fraction







*Home button cover*


**PL**

Plastics

- 12.** Remove the SIM tray from the enclosure. Separate the SIM card from the SIM tray.

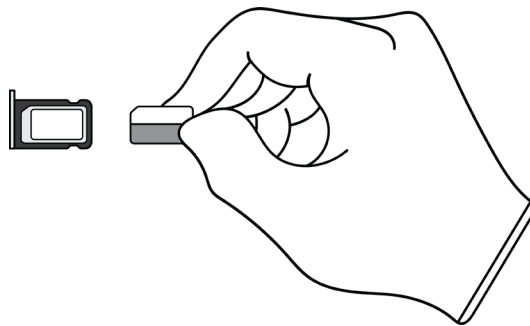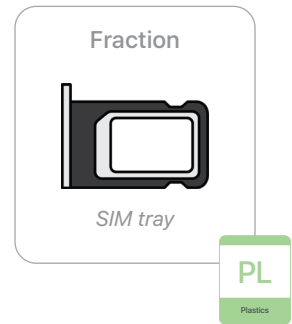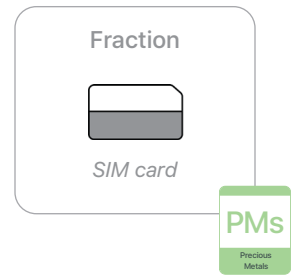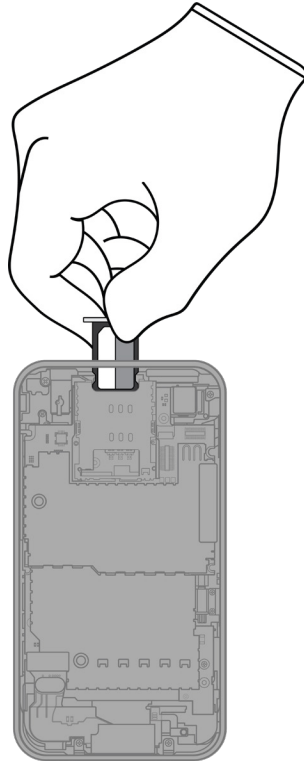


**13.** Pry off the three main logic board covers.

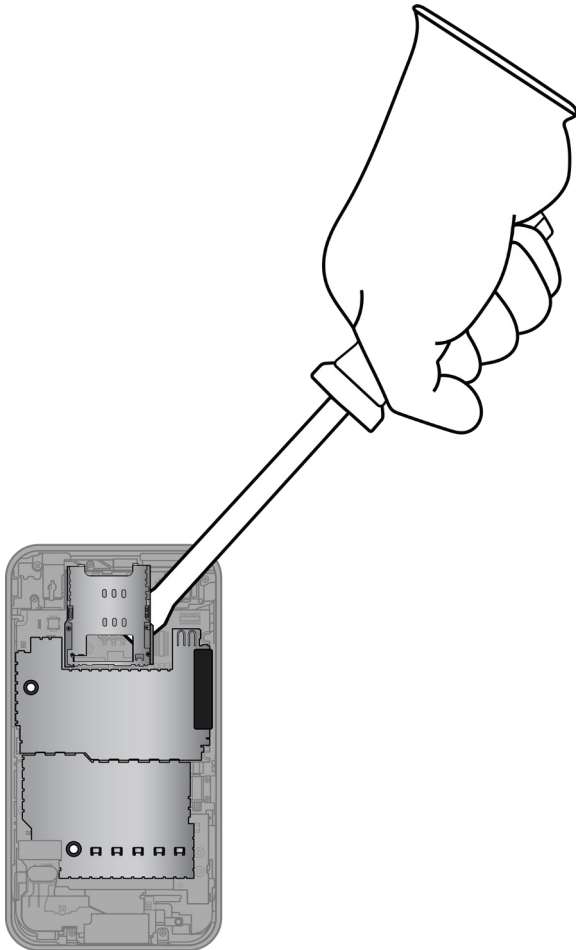

Tools Used




Fraction




Main logic board covers

Fe  
Ferrous


# 14. Pry off the main logic board.

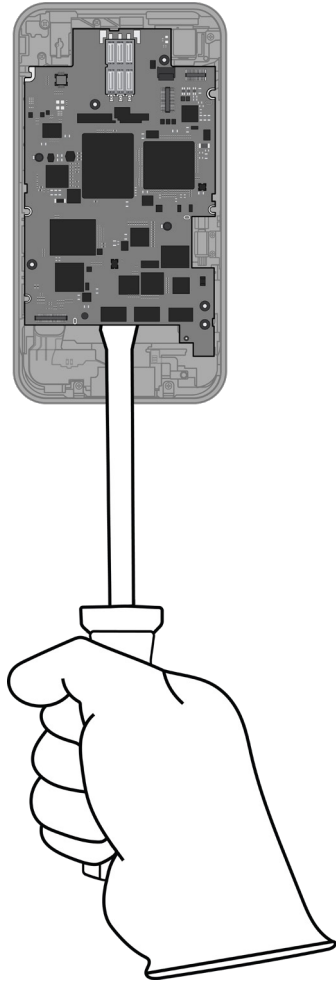

## Tools Used



## Fraction




Main logic board



## 15. Carefully remove the lithium-ion polymer battery.




Rechargeable battery hazard

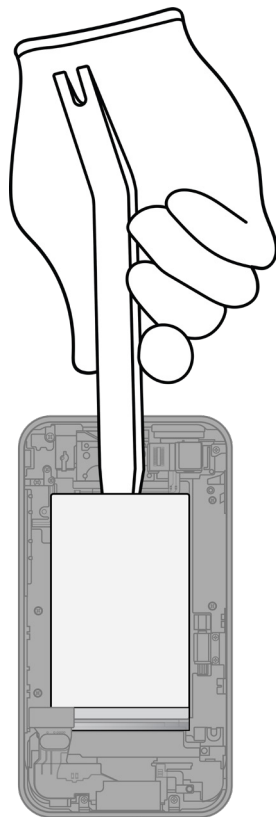

### Tools Used



### Fraction

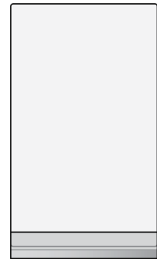


Lithium-ion polymer  
battery

BT

Battery


## 16. Pry off the headphone jack.

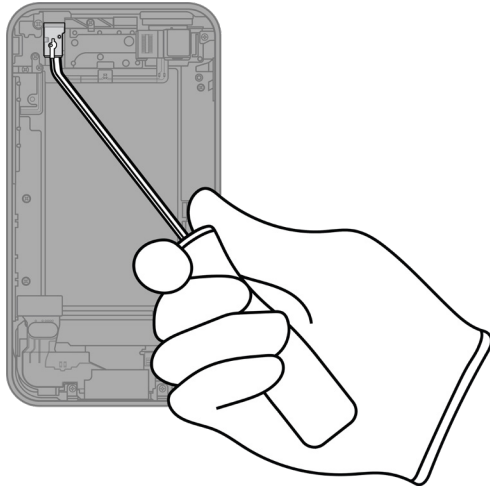

### Tools Used




### Fraction



Headphone jack

**Cu**  
Copper

## 17. Pry off the camera.

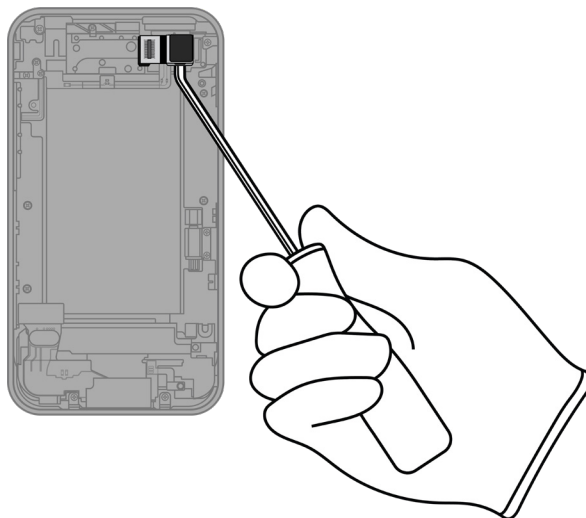

### Tools Used




### Fraction



Camera

**PMs**  
Precious Metals


## 18. Pry off the vibration motor.

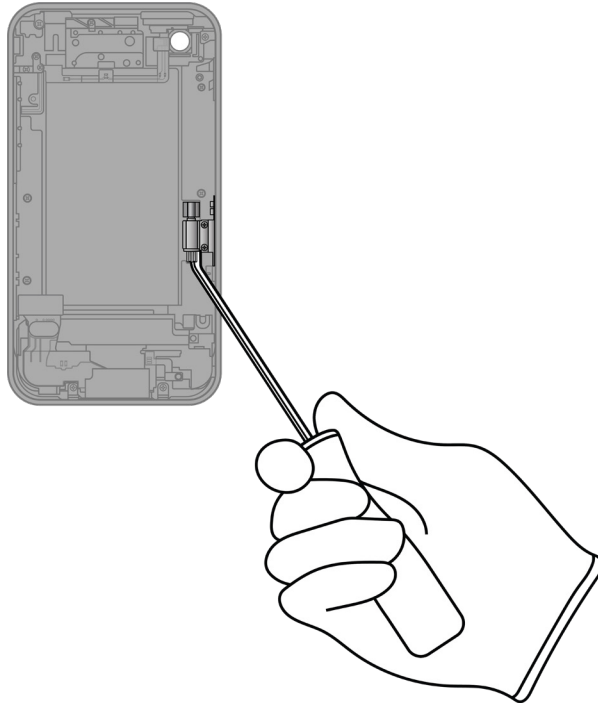

### Tools Used



### Fraction




Vibration motor

Cu

Copper




- 19.** Pry off the speaker assembly. Set the enclosure aside.

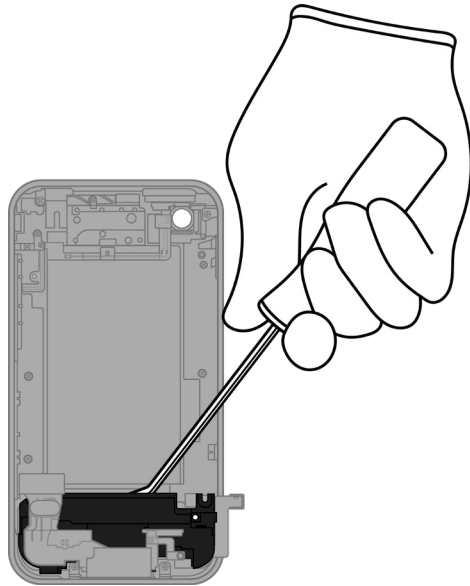

Tools Used



20. Pry off the speaker lid.

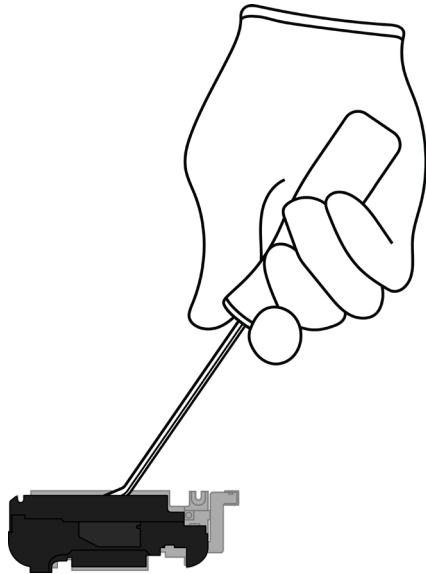

Tools Used



Fraction




Speaker lid

PL

Plastics

21. Pry off the speaker.

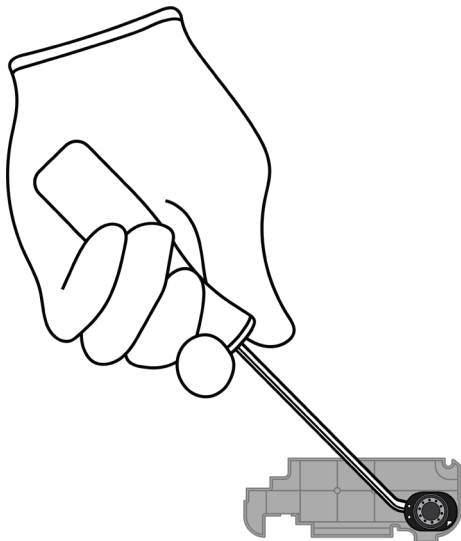

Tools Used



Fraction



Speaker

REE

Rare Earth Elements

Fraction




Speaker enclosure


PL

Plastics


**22.** Inside the enclosure, pry off the charging port.

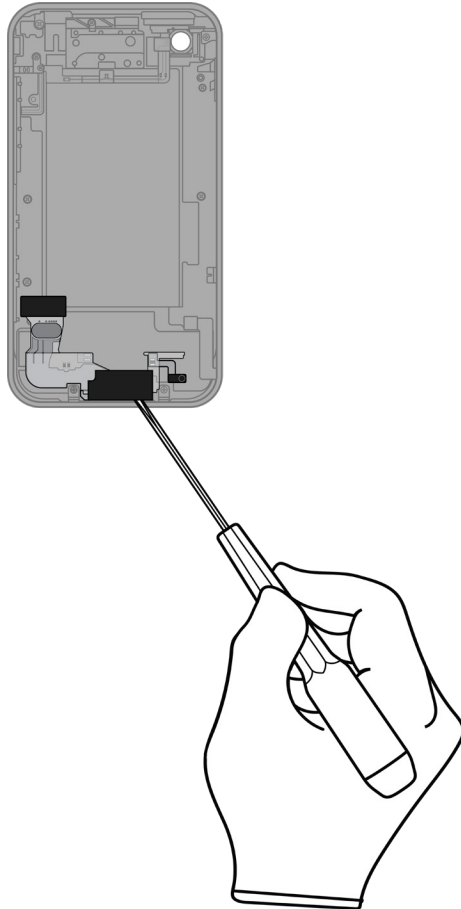

Tools Used



Fraction





Charging port


Cu

Copper

- 23.** Remove the two ribbon cables from the top and bottom of the enclosure.

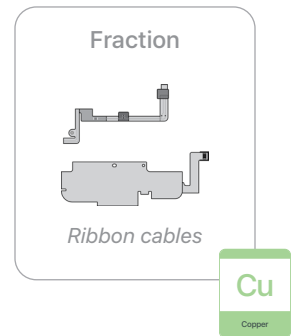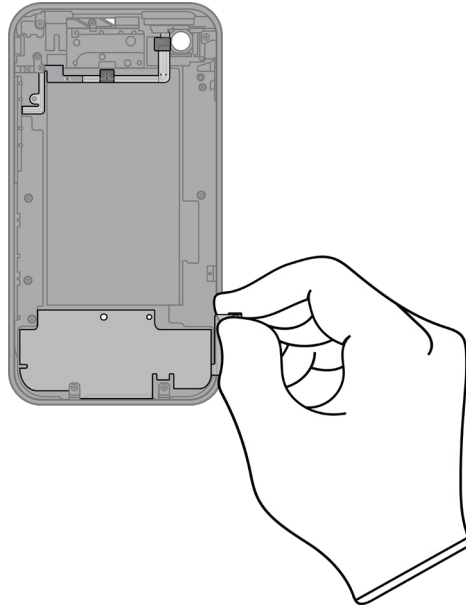


## 24. Pry the enclosure band off the cover.

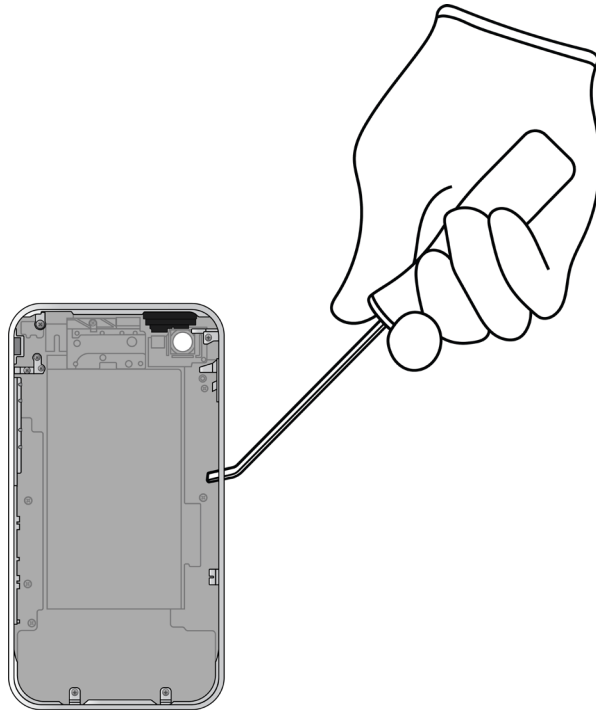

### Tools Used



### Fraction

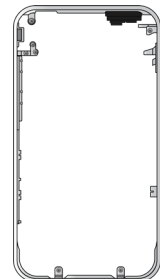

*Enclosure band*

Fe

Ferrous

### Fraction



*Enclosure cover*

PL

Plastics

# Material Categorization of Output Fractions

All outputs from this process must be managed, handled, and disposed of in accordance with applicable waste laws and regulations, including but not limited to the Waste Framework Directive and its national enactments in Europe.

Fraction	Downstream Processing
----------	-----------------------

**Batteries**




*Lithium-ion polymer battery*


**Primary Target Material**



**Ferrous**



*Display cover*



*Receiver cover*

**Primary Target Material**




**Potential Additional Materials**



**Fraction**

**Downstream Processing**

**Ferrous (cont.)**



*Main logic board covers*



*Enclosure band*

**Glass**



*LCD cell*



*Front panel*

**Primary Target Material**



**Potential Additional Materials**




**Fraction**

**Downstream Processing**

**Logic Boards**



*SIM card*



*Main logic board*



*Camera*

**Primary Target Material**



**Potential Additional Materials**







## Fraction

## Downstream Processing



### Mixed Electronics




Power adapter

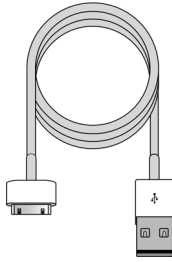


Charge cable



Ribbon cables



Home button



Headphone jack


### Primary Target Material




### Potential Additional Materials



**Mixed Electronics (cont.)**



*Vibration motor*



*Charging port*

**Mixed Plastics**



*Home button cover*



*SIM tray*



*Speaker lid*

**Primary Target Material**



Mixed Plastics (cont.)



Speaker enclosure



Enclosure cover

Rare Earth Magnets



Receiver



Speaker

Primary Target Material



Potential Additional Materials

